

06-14-00

09/581457T/\$

U.S. Application No.
Unknown
Date June 12, 2000

International Application No.
PCT/GB98/03728

Attorney Docket No.
RJENK15.001APC

526 Rec'd PCT/PTO 12 JUN 2000
Page 1

**TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 USC 371**

International Application No.: PCT/GB98/03728
International Filing Date: December 11, 1998
Priority Date Claimed: December 12, 1997
Title of Invention: METHOD FOR TRANSMITTING MEASUREMENT REPORTS IN A
MOBILE COMMUNICATIONS SYSTEM
Applicant(s) for DO/EO/US: Paul Reynolds, Stephen Hope

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. (X) This is a **FIRST** submission of items concerning a filing under 35 USC 371.
2. () This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 USC 371.
3. (X) This express request to begin national examination procedures (35 USC 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 USC 371(b) and PCT Articles 22 and 39(1).
4. (X) A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. (X) A copy of the International Application as filed (35 USC 371(c)(2))
 - a) () is transmitted herewith (required only if not transmitted by the International Bureau).
 - b) (X) has been transmitted by the International Bureau.
 - c) () is not required, as the application was filed in the United States Receiving Office (RO/US).
6. () A translation of the International Application into English (35 USC 371(c)(2)).
7. (X) Amendments to the claims of the International Application under PCT Article 19 (35 USC 371(c)(3))
 - a) () are transmitted herewith (required only if not transmitted by the International Bureau).
 - b) () have been transmitted by the International Bureau.
 - c) () have not been made; however, the time limit for making such amendments has NOT expired.
 - d) (X) have not been made and will not be made.
8. () A translation of the amendments to the claims under PCT Article 19 (35 USC 371(c)(3)).
9. () An oath or declaration of the inventor(s) (35 USC 371(c)(4)).
10. () A copy of the International Preliminary Examination Report with any annexes thereto, such as any amendments made under PCT Article 34.
11. () A translation of the annexes, such as any amendments made under PCT Article 34, to the International Preliminary Examination Report under PCT Article 36 (35 USC 371(c)(5)).

U.S. Application No.
Unknown

International Application No.
PCT/GB98/03728

09/581457

Attorney Docket No.

BJENK15.001APC

416 Rec'd PCT/PTO 12 JUN 2000

Date: June 12, 2000

Page 2

Items 11. to 16. below concern other document(s) or information included:

12. () An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
13. () An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
14. (X) A FIRST preliminary amendment.
() A SECOND or SUBSEQUENT preliminary amendment.
15. () A substitute specification.
16. () A power of attorney and/or address letter.
17. (X) International Application as published.
18. () Small Entity Statement.
19. () PCT Form PCT/IPEA/402.
20. () PCT Form PCT/IB/308.
21. () PCT request form.
22. (X) A return prepaid postcard.
23. (X) The following fees are submitted:

U.S. Application No.
Unknown

International Application No.
PCT/GB98/03728

09/581457

Attorney Docket No.

RIENK15,001APC

416 Rec'd PCT/PTO 12 JUN 2000

Date: June 12, 2000

Page 3

				FEES
BASIC FEE				\$840
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total Claims	20 - 20 =	0 ×	\$18	\$0
Independent Claims	5 - 3 =	2 ×	\$78	\$156
Multiple dependent claims(s) (if applicable)			\$260	\$0
TOTAL OF ABOVE CALCULATIONS				\$996
Reduction by 1/2 for filing by small entity (if applicable). Verified Small Entity statement must also be filed. (NOTE 37 CFR 1.9, 1.27, 1.28)				\$0
TOTAL NATIONAL FEE				\$996
TOTAL FEES ENCLOSED				\$996
amount to be refunded:				\$0
amount to be charged:				\$0

24. (X) The fee for later submission of the signed oath or declaration set forth in 37 CFR 1.492(e) will be paid upon submission of the declaration.
25. (X) A check in the amount of \$996 to cover the above fees is enclosed.
26. () Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40 per property.
27. (X) The Commissioner is hereby authorized to charge only those additional fees which may be required, now or in the future, to avoid abandonment of the application, or credit any overpayment to Deposit Account No. 11-1410. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

KNOBBE, MARTENS, OLSON & BEAR, LLP
620 Newport Center Drive
Sixteenth Floor
Newport Beach, CA 92660

Signature

John M. Carson
Printed Name

34,303
Registration Number

09/581457

416 Rec'd PCT/PTO 12 JUN 2000

PATENT

RJENK15.001APC

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant	:	Paul Reynolds, et al.)	Group Art Unit Unknown
)	
Appl. No.	:	Unknown)	I hereby certify that this correspondence and all
)	marked attachments are being deposited with
Filed	:	Herewith)	the United States Postal Service as first-class
)	mail in an envelope addressed to Assistant
)	Commissioner for Patents, Washington, D.C.
)	20231, on
For	:	METHOD FOR)	June 12, 2000
		TRANSMITTING)	(Date)
		MEASUREMENT REPORTS)	
		IN A MOBILE)	
		COMMUNICATIONS)	
		SYSTEM)	
)	
Examiner	:	Unknown)	John M. Carson, Reg. No. 34,303

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

Prior to examination of the above-captioned application, please amend the application as follows:

IN THE SPECIFICATION:

Please amend the specification as follows. The amendments are made with reference to the published PCT application PCT/GB98/03728:

On page 1, line 2, please insert --Field of the Invention--.

On page 1, between lines 6 and 7, please insert --Background of the Invention--.

On page 2, between lines 4 and 5, please insert --Summary of the Invention--.

On page 4, between lines 2 and 3, please insert --Brief Description of the Drawings--.

On page 4, between lines 12 and 13, please insert --Detailed Description of Certain Inventive Embodiments--

On page 16, line 1, please replace "CLAIMS" with --WHAT IS CLAIMED IS:--

Appl. No. : Unknown
Filed : Herewith

IN THE CLAIMS:

Please cancel Claims 1-20 without prejudice.

Please add the following new claims:

21. A method of transmitting signalling reports from a mobile station to a serving base station in a cellular communications system comprising a network infrastructure and a plurality of base stations connected thereto, the method comprising:

transmitting radio measurement reports intended for use by the serving base station to allocate a radio resource to the mobile station; and

transmitting a radio resource signalling report intended for use by a service node in the network infrastructure to allocate a radio resource to the mobile station.

22. The method of Claim 21, further comprising encapsulating the radio resource signalling reports in the form of a mobile-originating SMS message.

23. The method of Claim 21, wherein the transmitting the radio resource signalling report occurs during a dedicated channel traffic connection for the mobile station.

24. The method of Claim 21, wherein the radio resource signalling report comprises downlink quality data measured for the serving base station.

25. The method of Claim 21, wherein the radio resource signalling report comprises signal strength data measured for neighboring cell base stations.

26. The method of Claim 21, wherein the radio resource signalling data comprises data specifying the current requirements of the mobile station.

27. The method of Claim 26, wherein the current requirements comprises at least one of bandwidth signal-to-noise ratio, radio path loss, cost and quality of service requirements.

28. The method of Claim 21, wherein the transmitting the radio resource signalling report occurs in response to a request from the cellular communications system.

29. The method of Claim 21, wherein the transmitting the radio resource signalling report occurs in response to a request from the user.

30. A method of transmitting radio resource signalling reports from a mobile station in a cellular communications system, comprising:

transmitting the reports in the form of mobile-originating SMS messages.

Appl. No. : Unknown
Filed : Herewith

31. A method of transmitting signalling reports from a mobile station to a cellular communications system comprising a plurality of base stations including a base station serving the mobile station via a radio link, the method comprising:

encapsulating a radio resource signalling report before transmission over the radio link, such as to prevent the serving base station from intercepting the radio resource signalling report.

32. A mobile station for a cellular communications system, comprising a transmitter configured to transmit radio measurement reports intended for use by a serving base station to allocate a radio resource to the mobile station, and to transmit a radio resource signalling report intended for use by a service node in a network infrastructure to allocate a radio resource to the mobile station.

33. A cellular communications system comprising:

a plurality of base stations adapted to conducting communications with mobile stations via a radio interface; and

a service node adapted to receive radio resource signalling reports generated by mobile stations when in connected mode in the system, the system being arranged to route the reports from the plurality of base stations to the service node.

34. The system of Claim 33, wherein the radio resource signalling reports comprise at least one of downlink quality data measured by the mobile stations and neighbor cell signal strength data measured by the mobile stations.

35. The system of Claim 33, wherein the radio resource signalling reports comprise data specifying bandwidth and at least one of cost and quality of service requirements for the mobile stations.

36. The system of Claim 33, wherein the service node is adapted to select radio access nodes to be allocated to the mobile stations on the basis of the reports.

37. The system of Claim 36, wherein the service node is adapted to select radio access nodes to be allocated to the mobile stations on the basis of individual bandwidth and at least one of quality of service and cost requirements for the mobile stations.

38. The system of Claim 33, wherein the base stations are adapted to select radio resources to be allocated to the mobile stations on the basis of radio measurement reports received from the mobile stations.

Appl. No. : Unknown
Filed : Herewith

39. The system of Claim 33, wherein the system is adapted to transmit a request for the one of the reports to one of the mobile stations in response to a change in the service conditions for the one mobile station.

40. The system of Claim 33, further comprising means for extracting the radio resource signalling reports from SMS messages received from the mobile stations.

REMARKS

The foregoing amendments are to more closely conform the application to U.S. practice. No new matter is added. Entry of the amendments is respectfully requested.

Respectfully submitted,

KNOBBE, MARTENS, OLSON & BEAR, LLP

Dated: 6/12/00

By: _____

John M. Carson
Registration No. 34,303
Attorney of Record
620 Newport Center Drive
Sixteenth Floor
Newport Beach, CA 92660
(619) 235-8550

H:\DOCS\MOH\MOH-3309.DOC
060700

WO 99/31918

3 / PRTS

09/581457

PCT/GB98/03728

416 Rec'd PCT/PTO 12 JUN 2000

METHOD FOR TRANSMITTING MEASUREMENT REPORTS IN A MOBILE COMMUNICATIONS
SYSTEM

This invention relates to mobile communications, in particular to the transmission of radio resource signalling reports from mobile stations in a cellular communications system, and to the handling thereof within the system.

In known mobile communications systems, such as the GSM (Global System for Mobile communications), it is known for mobile stations to take radio link measurements during progress of a call, and to report these measurements to the serving base station. The base station uses these downlink measurement reports in order to determine when a handover is required.

Handover is initiated by the base station using radio sub-system criteria (signal strength level, link quality, link distance, etc) as well as network directed criteria (e.g. current traffic loading per cell, maintenance requests, etc).

In addition, current networks such as GSM networks include a mobile switching centre (MSC), a second generation component in the form of a large, central switch.

Third generation systems are proposed in which various levels of service are provided and in which the MSC functionality is provided in a distributed processing environment, rather than in the form of a central switch.

WO 99/31918

PCT/GB98/03728

2

It would be desirable to provide a more flexible and sophisticated approach to radio resource allocation. It would also be desirable to provide for the re-use of existing mobile network elements, in particular base stations, whilst providing enhanced radio resource signalling functionalities.

5 In accordance with one aspect of the invention there is provided a method of transmitting signalling reports from a mobile station to a serving base station in a cellular communications system comprising a network infrastructure and a plurality of base stations connected thereto, said method comprising transmitting radio measurement reports intended for use by said
10 serving base station to allocate a radio resource to said mobile station, and transmitting a radio resource signalling report intended for use by a service node in said network infrastructure to allocate a radio resource to said mobile station.

This aspect of the invention allows radio resources to be allocated by
15 the serving base station when appropriate, whilst also allowing radio resources to be allocated by a service node higher in the network hierarchy in other circumstances. This prevents excessive signalling load in the network, whilst allowing additional parameters not available to the base station to be taken into account when allocating radio resources in these other circumstances.

20 In accordance with a further aspect of the invention there is provided a method of transmitting signalling reports from a mobile station to a cellular communications system comprising a plurality of base stations including a

00501457 004400
00760 254850

WO 99/31918

PCT/GB98/03728

3

base station serving said mobile station via a radio link, said method comprising encapsulating a radio resource signalling report before transmission over said radio link, such as to prevent said serving base station from intercepting said radio resource signalling data.

5 This aspect of the invention provides a method whereby radio resource signalling reports may be transmitted transparently through the serving base station, and onwards to further elements in the system. The encapsulation is preferably by means of a mobile-originating SMS message, which allows existing radio interface functionality to be used to conceal the radio resource
10 signalling report from the base station.

In accordance with a yet further aspect of the invention there is provided a cellular communications system comprising a plurality of base stations for conducting communications with mobile stations via a radio interface, and a service node for collecting radio resource signalling reports
15 generated by mobile stations when in connected mode in said system, said system comprising means for receiving said reports from said plurality of base stations and for routing same to said service node.

This aspect of the invention provides for the collection and use of radio resource-related data at the service node, to allow radio resource
20 allocation to be conducted by said service node on the basis of such radio resource signalling reports. For example, the service node may perform handover decision algorithms on the basis of the data contained in the radio

WO 99/31918

PCT/GB98/03728

4

resource signalling reports, along with other data such as data specifying bandwidth, cost and/or quality of service requirements for the mobile stations.

Preferred embodiments of the invention will now be described with reference to the accompanying drawings, wherein:

5 Figure 1 is a schematic block diagram of a prior art mobile communications network;

 Figure 2 is a schematic block diagram of a mobile station for use in relation to the present invention;

 Figure 3 is a schematic block diagram of a mobile communications
10 system in accordance with the present invention; and

 Figure 4 is a schematic diagram illustrating functionality provided in accordance with the present invention.

 A GSM network, referred to as a public land mobile network (PLMN), is schematically illustrated in Figure 1. This is in itself known and will not be
15 described in detail. A mobile switching centre (MSC) 2 is connected via communication links to a number of base station controller (BSCs) 4. The BSCs 4 are dispersed geographically across areas served by the mobile switching centre 2. Each BSC 4 controls one or more base transceiver stations (BTSs) 6 located remote from, and connected by further
20 communication links to, the BSC. Each BTS 6 transmits radio signals to, and receives radio signals from, mobile stations 8 which are in an area served by that BTS. That area is referred to as a "cell". A GSM network is provided

WO 99/31918

PCT/GB98/03728

5

with a large number of such cells, which are ideally contiguous to provide continuous coverage over the whole network territory. Indeed, a number of GSM networks may operate in the same areas to provide overlapping coverage.

5 The mobile switching centre 2 is also connected via communications links to other mobile switching centres in the remainder of the mobile communications network 10, and to other networks such as a public service telephone network (PSTN), which is not illustrated. The mobile switching centre 2 is provided with a home location register (HLR) 12 which is a
10 database storing subscriber authentication data including the international mobile subscriber identities (IMSI)s which are unique to each mobile station 8. An IMSI consists of a mobile country code (3 decimal digits), a mobile network code (2 decimal digits) and a mobile subscriber code (up to 10 decimal digits) identifying a subscriber within a particular network. The IMSI
15 is also stored in the mobile station in a subscriber identity module (SIM) (to be described below) along with other subscriber-specific information.

 The mobile switching centre is also provided with a visitor location register (VLR), not shown, which is a database temporarily storing subscriber authentication data for mobile stations active in its area.

20 In addition, the MSC is connected to a short message centre (SMC) 14 for handling the transfer of short messages addressed to and from mobile stations within the network. The short message service (SMS) is a point-to-

WO 99/31918

PCT/GB98/03728

6

point message service as specified in GSM Technical Specification 03.40. A user of a mobile station 8 may generate a mobile-originating SMS message by input to a Man Machine Interface (MMI) (e.g. a keypad) of the mobile station 8, and transmit the message, along with a destination address, to the servicing

5 BTS 6. The message is forwarded transparently to the MSC 2, which directs the message on to the SMC 14. The SMC 14 generally holds the message and handles the onward transmission to the terminating station corresponding to the directory number specified in the SMS message by the user of the mobile station 8.

10 When switched on within coverage of the mobile network, the mobile station has two possible modes, namely idle mode and connected mode. Both of these are described in GSM Technical Specification 05.08.

In idle mode, the mobile station 8 measures radio sub-system downlink performance and signal strengths received from surrounding cells.

15 The mobile station 8 selects a preferred cell according to a cell selection algorithm, and informs the network via a signalling channel of its selection. Occasionally, when the mobile station moves to a new cell site, the mobile station transmits a location update to the mobile network via a signalling channel.

20 When in connected mode, the mobile station 8 initiates a call establishment procedure and is allotted a dedicated channel (a "connection") for the transfer of voice and/or data traffic over the radio interface. The

WO 99/31918

PCT/GB98/03728

7

dedicated channel includes a main traffic channel (TCH) for carrying the voice or data traffic, and a low-rate signalling channel (the Slow Associated Control Channel, SACCH). When in connected mode, the mobile station continuously performs radio measurements from the serving cell BTS and from neighbouring cell BTSs. These measurements are regularly reported to the serving cell BTS on the SACCH. The mobile station can report measurements relating to a number of candidate target cells in addition to the measurements relating to the serving cell. These measurements allow the serving BSC to decide when and whereto the handover of a given mobile station in connected mode is to be initiated. The BSC intercepts the measurement reports generated by the mobile station and sent on the SACCH part of the dedicated channel.

It is also possible for the mobile station to send and receive, short messages (SMS messages) when in connected mode. Such short messages are then sent over the SACCH part of the dedicated channel assigned to the mobile station, and are differentiated from signalling (in particular, the measurement reporting signalling) transmitted over the SACCH by means of a different link identifier (SAPI). The signalling messages are allotted SAPI 0, whilst short messages are allotted SAPI 3. The mobile-originating short messages are not intercepted by the BSC, but are transmitted to the MSC, which generally directs the short messages using the destination address in the short message header to the SMC.

WO 99/31918

PCT/GB98/03728

8

Figure 3 schematically illustrates an embodiment of the present invention, in which re-use of GSM-type BSCs 4 and BTSs 6, as well as at least part of the GSM radio interface, is possible, whilst a distributed processing network infrastructure, using intelligent network (IN)-type functionality, replaces the prior art elements associated with and including the MSC 2.

In the arrangement of this embodiment of the invention, the BSCs 4 of one connectivity provider are connected to a first service access node 100, whereas those of a second connectivity provider are connected to a second service access node 102.

Each of the service access nodes 100, 102 have connections to service provision, mobility management, switching and other connection elements, not illustrated. The service access nodes 100, 102 are interconnected using an ATM link 104.

In addition, a service node 106 is connected to each of the service access nodes 100, 102, using signalling links. The service node 106 is provided with a database 108. The service node 106 is adapted to perform predefined handover algorithms in order to make handover decisions based on parameters stored in database 108.

The data stored in database 108 includes, for all currently-active subscribers in each of the areas covered by the two connectivity providers, data relating to the following:

WO 99/31918

PCT/GB98/03728

9

1. Radio link quality. Radio link measurement is performed for the current downlink in the mobile station 8, and for the current uplink in the serving BTS 6. The measurements include, for example, bit error rate, delay, delay jitter, change in quality of service, link loss probability and the time before link loss.

2. A list of target radio access nodes. This is needed to determine the cell to which the radio link should be handed over to. The list is accompanied by information regarding the node capacity and node occupation.

3. Personal subscriber profile and service information, including bandwidth requirements, quality of service requirements, access rights, priority and preference lists, environment selection, provider selection, etc.

4. Operational criteria, which include all the quasi-static parameters (congestion and load control related parameters) required to identify the need for handover.

The mobile station 8 performs radio link measurements for both the serving cell and the neighbouring cells during connected mode. In addition to the mobile station being adapted for transmitting these measurements in a conventional GSM-type measurement report as signalling on the SACCH to the serving BTS, the mobile station is adapted to encapsulate radio resource measurement reports in short messages which are addressed to the service node 106. The mobile-originating short message is constructed by the mobile

WO 99/31918

PCT/GB98/03728

10

station 8 using an originating address/destination address header combination identifying to the service access node 100 that the short message contains radio link measurement data, instead of a user-defined short message. This ensures that the service access node 100 transmits the measurement report short message to the service node 106, rather than the short message centre (not shown) provided in the intelligent network functionality.

Furthermore, since the measurement report is encapsulated as a short message, the measurement report is not intercepted by the serving BTS/BSC, which would otherwise be the case if the measurement report were transmitted as normal signalling on the SACCH. This takes the decision to attempt a handover out of the sole control of the BSC, and allows handover decisions to be made in the service node 106.

During connected mode, the transmission of measurement reports as normal signalling on the SACCH to the serving BTS/BSC generally occurs continually, such that normal handover decisions may then be made by the BSC 4.

When the mobile station has particular requirements e.g. bandwidth and/or quality of service, the SMS-encapsulated measurement reports are transmitted by the mobile station instead of, or in addition to, the normal signalling measurement reports, so as to allow radio resource allocation decisions to be made by the service node 106.

WO 99/31918

PCT/GB98/03728

11

The mobile station may be adapted to automatically transmit an SMS-encapsulated measurement report in response to detecting when predetermined service requirement criteria are met (or not met).

Alternatively or in addition, the mobile station may transmit an SMS-encapsulated measurement report on receipt of a request from the service node 106. The service node transmits such a request when other predetermined service requirement criteria are met.

The service node 106 can thus, on receipt of a measurement report, make handover decisions based on parameters not available to the individual BSCs, for example the personal profile and service information.

Figure 4 schematically illustrates a situation in which handover between two connectivity providers is possible, and in which the mobile terminal reports basic measurement data to the service node database 108. Mobile terminal 8 is in the vicinity of seven BTSs 6 having frequency channel numbers 835, 822, 788, 821, 780, 800 and 830 respectively. The signal strength measurements (between -106dBm and -80dBm) made by the mobile terminal are converted into corresponding quality index numbers (between 0 and 26), and these quality index numbers are encapsulated, along with the Base Station Identification codes and frequency channel numbers, in a mobile-originating SMS message which is transmitted automatically on the SACCH by the mobile terminal 8 to the serving BTS 6. The message is

WO 99/31918

PCT/GB98/03728

12

transmitted transparently onwards through the serving BSC 4, into the network, represented by box 110, and into the service node database 108.

The measurement reporting data encapsulated in the short messages is thus sufficient to precisely identify base stations that are visible to the mobile station 8 by means of the base station identification codes, and their associated signal strengths. The service node 106 may decide, on executing a handover algorithm using this measurement data, that a handover should be executed from the serving BTS (frequency channel number 788) belonging to one connectivity provider to a second BTS (frequency channel number 800) belonging to a second connectivity provider. The handover, under instruction from the service node 106, is then performed in the network in accordance with known handover procedures.

A decision to handover a connection may be made based on criteria such as bandwidth (in the case where the mobile station has multiple bandwidth capabilities), quality of service and/or cost associated with each of the different access nodes provided by the connectivity providers. The SMS message may include data relating to the current requirements of the handset and/or the subscriber. For example, the SMS message may include identifiers for preferred connection providers, bandwidth requirements, cost limits, hardware and software version numbers of the handset, etc.

In the example described in relation to Figure 4, the measurement reports encapsulated in the SMS message contained only radio quality index

WO 99/31918

PCT/GB98/03728

13

numbers for each of the BTSs in the vicinity of the mobile station. It is envisaged that other parameters useful for performing handover decisions could also, or alternatively, be encapsulated in the SMS message. For example, the data may include, for the serving cell, the time slot number, the base station colour code, the global cell ID, the receive quality, the receive signal level and/or the number of neighbour cells. Similar data could be provided for each of the neighbour cells, subject to optimisation to minimise signalling load within the network.

A service node is provided in a mobile communications network which collects radio link measurement reports which are transmitted to the service node by mobile stations. The mobile stations transmit the measurement reports in encapsulated form, namely in the form of SMS messages, in order to prevent the interception of the measurement report by the serving base station.

The service node is able to perform handover decision algorithms using the measurement reports collected from the mobile stations in order to determine appropriate radio access nodes to be allocated to the mobile stations.

It is to be mentioned that handover decisions made by the service node need not be initiated only by the service node on receipt of the SMS-encapsulated reports. A handover request may be directed by the mobile station 8 to the service node 106. In this case, when the mobile station

WO 99/31918

PCT/GB98/03728

14

initiates the handover request, it encapsulates a measurement report as an SMS message directed at the service node 106, which performs the handover decision algorithm to determine which radio access node would best serve the mobile station.

5 In the above-described embodiments, the measurement report is encapsulated as a mobile-originating SMS message, to ensure that the measurement report is not intercepted by the serving BTS/BSC. It is envisaged that other modes of encapsulation would also be possible in order to prevent interception of a measurement report by the serving BTS/BSC. For
10 example, the measurement report may be carried using an envelope and/or a message discriminator recognized at the serving BTS/BSC such that the serving BTS/BSC acts as a transparent relay for the measurement report and allowing the measurement report to reach the service node 106. A unique envelope definition could be provided for the encapsulation of such a
15 measurement report which is recognised by the BTS/BSC interface in the network and by the service access node(s), such that it is directed to the service node 106.

Furthermore, the present invention is not limited to the transmission of measurement reports to the service node 106. Alternative radio resource
20 signalling data, for example only user preferences, or user requirements or handover requests alone, could also be encapsulated and sent in a similar manner.

WO 99/31918

PCT/GB98/03728

15

Although a particular mobile station has been described above as an example, the mobile stations may be any or all of:

personal digital assistants,

cellular telephones,

5 satellite telephones,

video phones,

facsimiles,

portable personal computers, etc.

10 It should be mentioned that the present invention is not limited to arrangements in which GSM-type BSCs and BTSs are re-used. Other cellular network arrangements, in particular third generation systems, would also benefit from use of the present invention.

It is envisaged that further variations and modifications may be employed without departing from the scope of the present invention.

15

WO 99/31918

PCT/GB98/03728

16

CLAIMS

1. A method of transmitting signalling reports from a mobile station to a serving base station in a cellular communications system comprising a network infrastructure and a plurality of base stations connected thereto, said method comprising transmitting radio measurement reports intended for use by said serving base station to allocate a radio resource to said mobile station, and transmitting a radio resource signalling report intended for use by a service node in said network infrastructure to allocate a radio resource to said mobile station.

2. A method of transmitting signalling reports from a mobile station to a cellular communications system comprising a plurality of base stations including a base station serving said mobile station via a radio link, said method comprising encapsulating a radio resource signalling report before transmission over said radio link, such as to prevent said serving base station from intercepting said radio resource signalling report.

3. A method according to claim 1 or 2, comprising encapsulating said radio resource signalling reports in the form of a mobile-originating SMS message.

WO 99/31918

PCT/GB98/03728

17

4. A method according to claim 1, 2 or 3, comprising transmitting said radio resource signalling report during a dedicated channel traffic connection for said mobile station.

5 5. A method according to any preceding claim, said radio resource signalling report comprising downlink quality data measured for said serving base station.

10 6. A method according to any preceding claim, said radio resource signalling report comprising signal strength data measured for neighbouring cell base stations.

15 7. A method according to any preceding claim, said radio resource signalling data comprising data specifying the current requirements of said mobile station.

8. A method according to claim 7, said current requirements comprising bandwidth signal-to-noise ratio, radio path loss, cost and/or quality of service requirements.

20

WO 99/31918

PCT/GB98/03728

18

9. A method according to any preceding claim, comprising transmitting said radio resource signalling report in response to a request from said cellular communications system.

5 10. A method according to any of claims 1 to 8, comprising transmitting said radio resource signalling report in response to a request from said user.

10 11. A method of transmitting radio resource signalling reports from a mobile station in a cellular communications system, comprising transmitting said reports in the form of mobile-originating SMS messages.

12. A mobile station adapted to perform the method of any of claims 1 to 11.

15

13. A cellular communications system comprising a plurality of base stations for conducting communications with mobile stations via a radio interface, and a service node for receiving radio resource signalling reports generated by mobile stations when in connected mode in said system, said
20 system being arranged to route said reports from said plurality of base stations to said service node.

WO 99/31918

PCT/GB98/03728

19

14. A system according to claim 13, wherein said radio resource signalling reports comprise downlink quality data measured by said mobile stations and/or neighbour cell signal strength data measured by said mobile stations.

5

15. A system according to claim 13 or 14, wherein said radio resource signalling reports comprise data specifying bandwidth, cost and/or quality of service requirements for said mobile stations.

10

16. A system according to claim 13, 14 or 15, wherein said service node is adapted to select radio access nodes to be allocated to said mobile stations on the basis of said reports.

15

17. A system according to claim 16, wherein said service node is adapted to select radio access nodes to be allocated to said mobile stations on the basis of individual bandwidth, quality of service and/or cost requirements for said mobile stations.

20

18. A system according to any of claims 13 to 17, wherein said base stations are adapted to select radio resources to be allocated to said mobile stations on the basis of radio measurement reports received from said mobile stations.

005445-09400

WO 99/31918

PCT/GB98/03728

20

19. A system according to any of claims 13 to 18, wherein said system is adapted to transmit a request for said one of said reports to one of said mobile stations in response to a change in the service conditions for said one mobile station.

20. A system according to any of claims 13 to 19, comprising means for extracting said radio resource signalling reports from SMS messages received from said mobile stations.

WO 99/31918

09/581457

PCT/GB98/03728

1 / 3

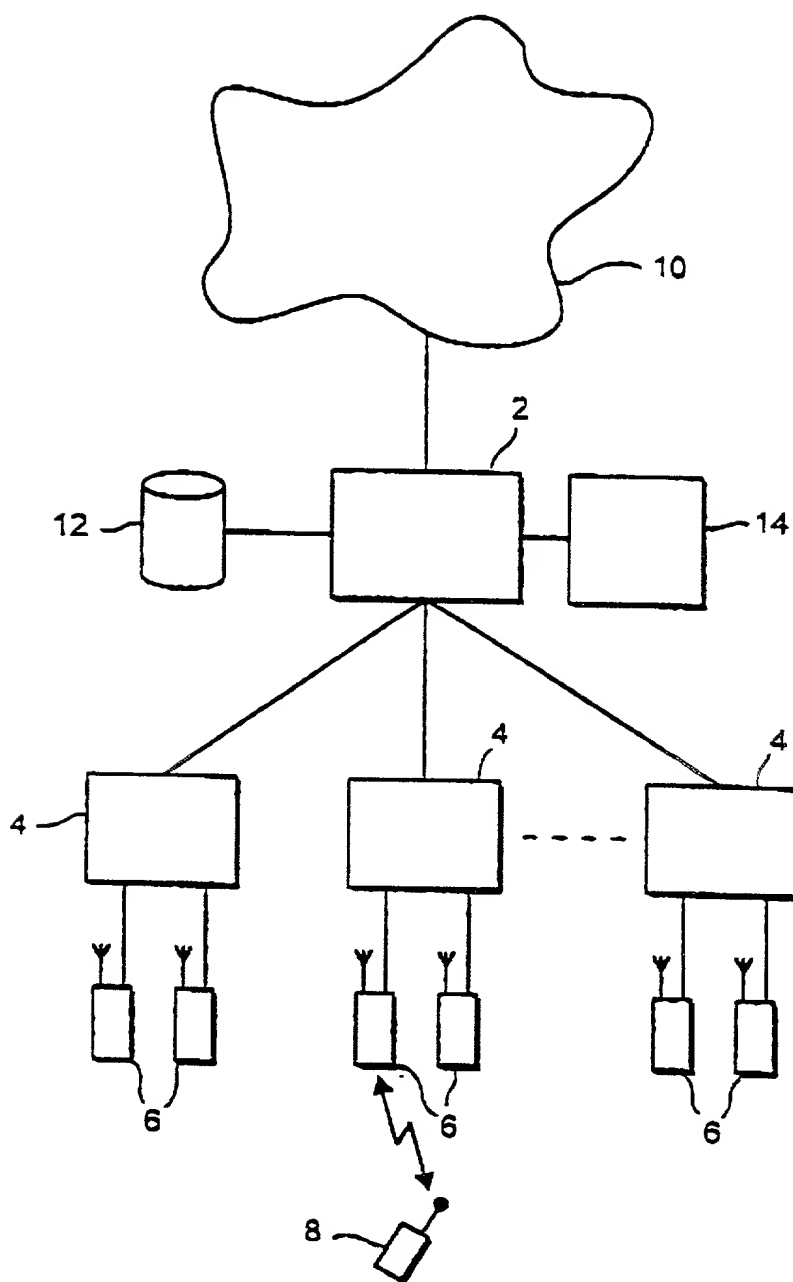


FIG. 1
(PRIOR ART)

WO 99/31918

09/581457

PCT/GB98/03728

2 / 3

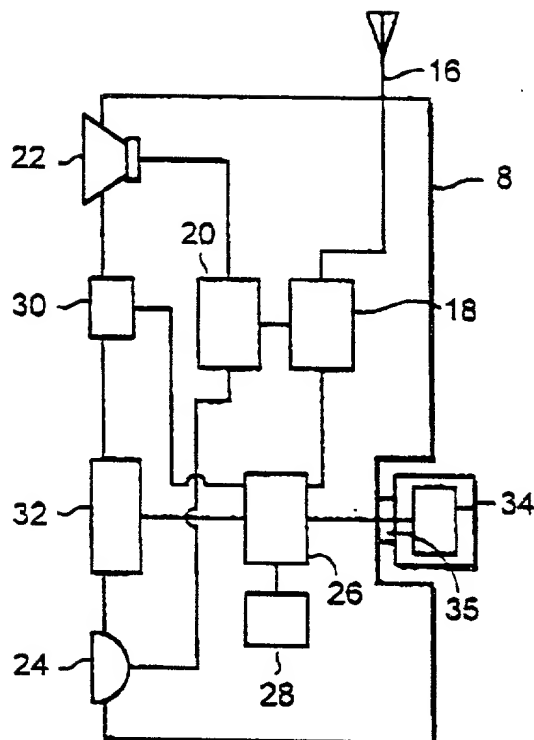


FIG. 2

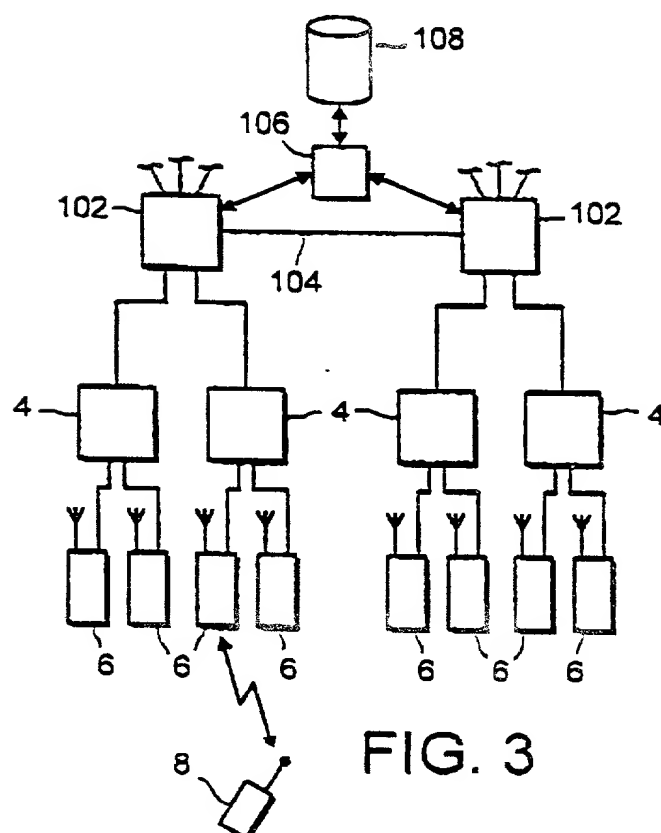


FIG. 3

09/581457

WO 99/31918

PCT/GB98/03728

3 / 3

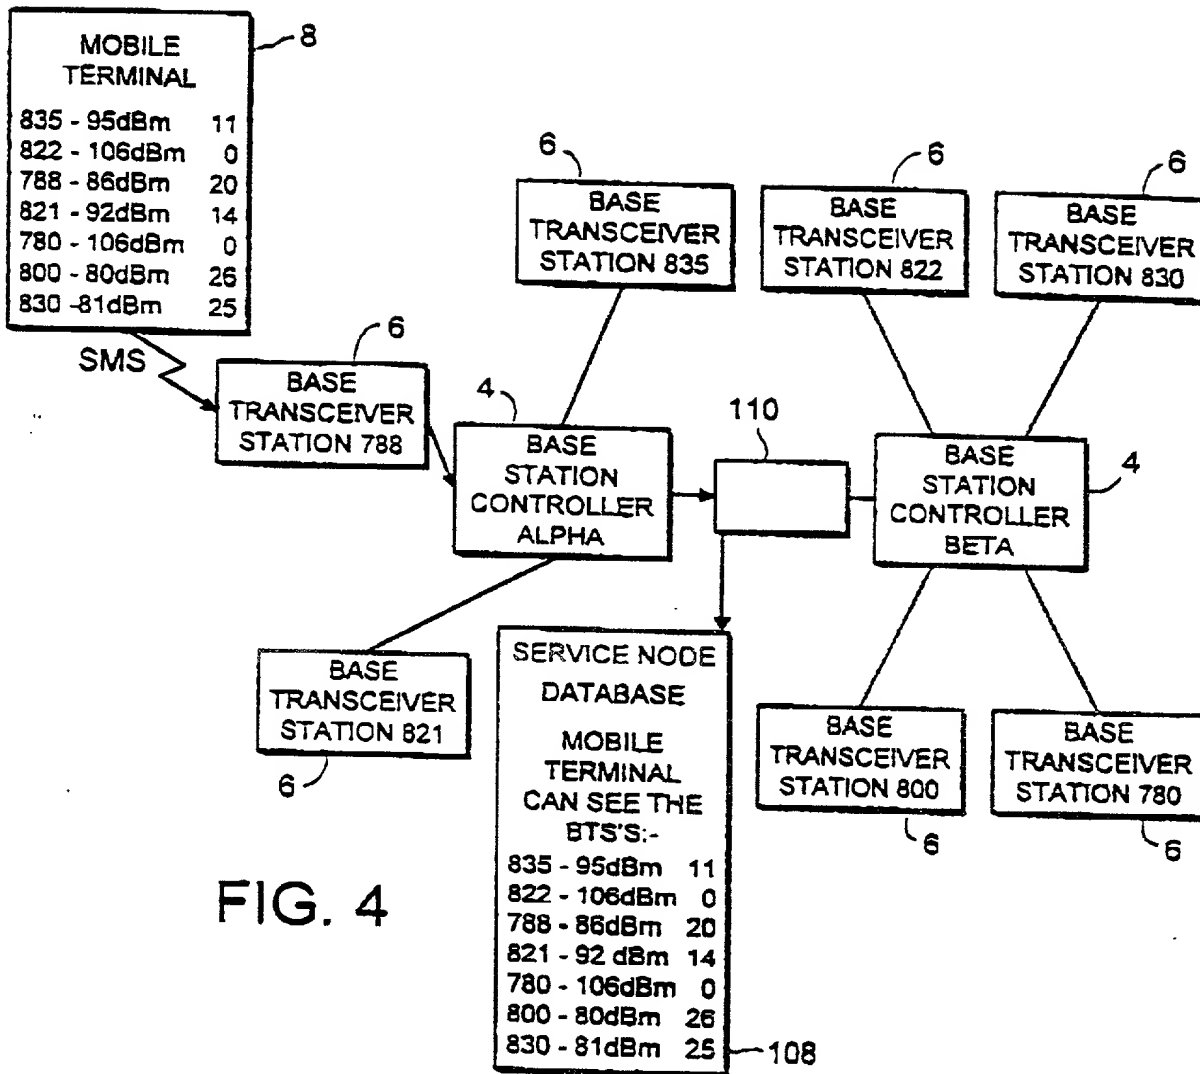


FIG. 4

PATENT

**ESTABLISHMENT OF RIGHT OF ASSIGNEE TO TAKE ACTION
AND
REVOCATION AND POWER OF ATTORNEY**

To the Commissioner of Patents and Trademarks:

The undersigned is empowered to act on behalf of the assignee indicated below (the "Assignee"). The original assignment of the attached application for Letters Patent for the invention in METHOD FOR TRANSMITTING MEASUREMENT REPORTS IN A MOBILE COMMUNICATIONS SYSTEM from the inventors to the Assignee is being submitted herewith for recordation by the Assignment Branch. A true copy of this Assignment is attached hereto. This Assignment represents the entire chain of title of this invention from the Inventor(s) to the Assignee. I have reviewed this Assignment, and to the best of the Assignee's knowledge and belief, the Assignee is the owner of the entire right, title, and interest in the above-referenced application.

I declare that all statements made herein of my own knowledge are true, and that all statements made upon information and belief are believed to be true, and further, that these statements were made with the knowledge that willful, false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. § 1001, and that willful, false statements may jeopardise the validity of the application, or any patent issuing thereon.

The undersigned hereby revokes any previous powers of attorney in the subject application, and hereby appoints the registrants of Knobbe, Martens, Olson & Bear, LLP, 620 Newport Centre Drive, Sixteenth Floor, Newport Beach, California 92660, Telephone (949) 760-0404, **Customer No. 20,995**, as its attorneys with full power of substitution and revocation to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected herewith. This appointment is to be to the exclusion of the inventor(s) and his attorney(s) in accordance with the provisions of 37 C.F.R. § 3.71.

Please use **Customer No. 20,995** for all communications.

Assignee: ORANGE PERSONAL
COMMUNICATIONS SERVICES LTD.

By: 

Printed Name: Jennifer P Wilson

Title: International General Counsel

Address: St. James Court, Great Park Road
Almondsbury, Bradley Stoke
Bristol BS12 4QJ, United Kingdom.

Dated: 10 August, 2000

DECLARATION - USA PATENT APPLICATION

As the below named inventor, we hereby declare that:

Our residence, post office address and citizenship are as stated below next to our names;

We believe we are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled **METHOD FOR TRANSMITTING MEASUREMENT REPORTS IN A MOBILE COMMUNICATIONS SYSTEM**

the specification of which

- ☐ is attached hereto.
☐ was filed on _____ as Application Serial Number _____ and was amended on _____ (if applicable).

☒ was described and claimed in PCT International Application No. PCT/GB98/03728 filed on 11 December 1998 and was amended under PCT Article 19 on _____ (if applicable).

We hereby state that we have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

We acknowledge the duty to disclose information which is material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56(a).

We hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent, design or inventor's certificate or of any PCT international application(s) Listed below and have also identified below any foreign application(s) for patent, design or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed for the same subject matter having a filing date before that of the application of which priority is claimed:

Prior Foreign Application(s)

Country	Application Number	Date of Filing (day, month, year)	Date of Issue (day, month, year)	Priority Claimed Under 37 U.S.C. §119
GB	9726362.8	12 December 1997		YES


Prior United States Application(s)

We hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, we acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial Number	Date of Filing (Day, Month, Year)	Status — Patented, Pending, Abandoned

KNOBBE MARTENS, OLSON & BEAR, LLP
 501 West Broadway, Suite 1400
 San Diego, California 92101-3505

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signature 

Date 1 AUG 2000

Full Name of

First Inventor

REYNOLDS

Paul

Laurence

Family Name

First Given Name

Second Given Name

Residence _____

Citizenship British.

Post Office

Address Wattles, Easton, Wells, Somerset BA5 1AT, United Kingdom G13X

Signature 

Date 9 AUG 2000

Full Name of

Second Inventor

HOPE

Stephen

Robert

Family Name

First Given Name

Second Given Name

Residence _____

Citizenship British.

Post Office

Address 1 Masons Way, Cheddar, Somerset BS27 3PG, United Kingdom G13X